


Acoustic performance

Product : Silver sleeve, polyester insulated, acoustic, flexible duct

Stock codes : 7266 through 7280

Thermal rating : R0.6 m²W/k

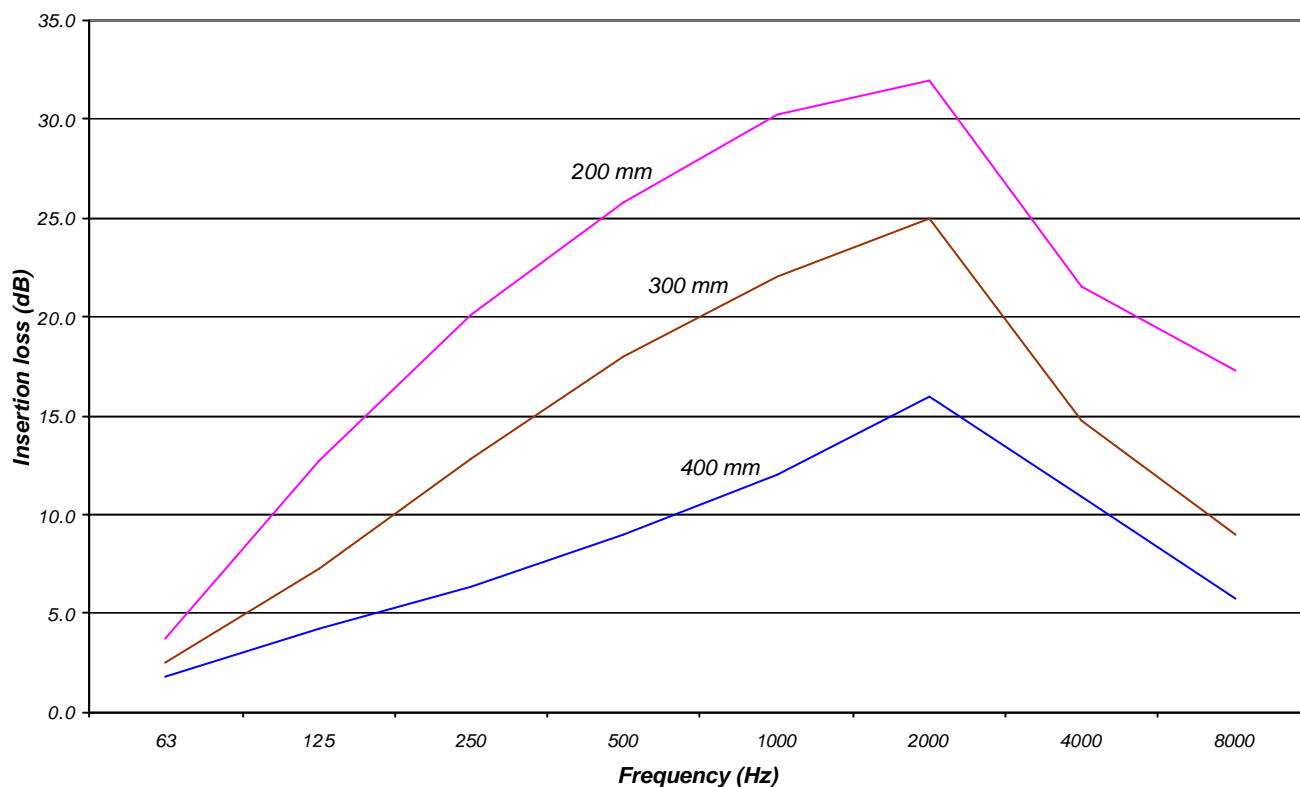

Typical insertion loss (dB) of 3 metre length of perforated duct. Note that the attenuation may be different for different lengths of ducts and data should be used as a guide. The attenuation may be limited by flanking transmission or noise breakout.